

graph twoway bar — Twoway bar plots

[Description](#)
[Options](#)

[Quick start](#)
[Remarks and examples](#)

[Menu](#)
[Reference](#)

[Syntax](#)
[Also see](#)

Description

`twoway bar` displays numeric (y,x) data as bars. `twoway bar` is useful for drawing bar plots of time-series data or other equally spaced data and is useful as a programming tool. For finely spaced data, also see [\[G-2\] graph twoway spike](#).

Also see [\[G-2\] graph bar](#) for traditional bar charts and [\[G-2\] graph twoway histogram](#) for histograms.

Quick start

Bar graph

```
twoway bar y x
```

A horizontal bar graph

```
twoway bar y x, horizontal
```

Bar graph with bars 0.8 times the default width

```
twoway bar y x, barwidth(.8)
```

Bars that extend from 0 when the range of y does not include 0

```
twoway bar y x, base(20)
```

Add the title “My Title” to the graph

```
twoway bar y x, title("My Title")
```

Same as above, but add a title “X variable” to the x axis

```
twoway bar y x, title("My Title") xtitle("X variable")
```

Same as above, but with separate graph areas for each value of `catvar`

```
twoway bar y x, xtitle("X variable") by(catvar, title("My Title"))
```

Menu

Graphics > Twoway graph (scatter, line, etc.)

Syntax

```
twoway bar yvar xvar [if] [in] [, options]
```

<i>options</i>	Description
<code>vertical</code>	vertical bar plot; the default
<code>horizontal</code>	horizontal bar plot
<code>base(#)</code>	value to drop to; default is 0
<code>barwidth(#)</code>	width of bar in <i>xvar</i> units
<i>barlook_options</i>	change look of bars
<i>colorvar_options</i>	change color of bars based on values of a variable
<i>marker_label_options</i>	add marker labels; change look or position
<i>axis_choice_options</i>	associate plot with alternative axis
<i>twoway_options</i>	titles, legends, axes, added lines and text, by, regions, name, aspect ratio, etc.

Options `base()` and `barwidth()` are *rightmost*, and `vertical` and `horizontal` are *unique*; see [G-4] **Concept: repeated options**.

Options

`vertical` and `horizontal` specify either a vertical or a horizontal bar plot. `vertical` is the default.

If `horizontal` is specified, the values recorded in *yvar* are treated as *x* values, and the values recorded in *xvar* are treated as *y* values. That is, to make horizontal plots, do not switch the order of the two variables specified.

In the `vertical` case, bars are drawn at the specified *xvar* values and extend up or down from 0 according to the corresponding *yvar* values. If 0 is not in the range of the *y* axis, bars extend up or down to the *x* axis.

In the `horizontal` case, bars are drawn at the specified *xvar* values and extend left or right from 0 according to the corresponding *yvar* values. If 0 is not in the range of the *x* axis, bars extend left or right to the *y* axis.

`base(#)` specifies the value from which the bar should extend. The default is `base(0)` when 0 falls between the minimum and maximum of *yvar*. Otherwise, the default base is the value of *yvar* closest to 0.

`barwidth(#)` specifies the width of the bar in *xvar* units. The default is `width(1)`. When a bar is plotted, it is centered at *x*, so half the width extends below *x* and half above.

barlook_options set the look of the bars. The most important of these options is `color(colorstyle)`, which specifies the color and opacity of the bars; see [G-4] *colorstyle* for a list of color choices. See [G-3] *barlook_options* for information on the other *barlook_options*.

colorvar_options specify that the color of the bars be determined by the levels of the numeric variable *colorvar*; see [G-3] *colorvar_options*.

marker_label_options specify labels to appear above the bars. See [G-3] *marker_label_options* for a description of marker labels and the options that control them.

`axis_choice_options` associate the plot with a particular y or x axis on the graph; see [G-3] [axis_choice_options](#).

`twoway_options` are a set of common options supported by all `twoway` graphs. These options allow you to title graphs, name graphs, control axes and legends, add lines and text, set aspect ratios, create graphs over by() groups, and change some advanced settings. See [G-3] [twoway_options](#).

Remarks and examples

[stata.com](http://www.stata.com)

Remarks are presented under the following headings:

Typical use

Advanced use: Overlaying

Advanced use: Population pyramid

Cautions

Typical use


We have daily data recording the values for the S&P 500 in 2001:

```
. use https://www.stata-press.com/data/r18/sp500
(S&P 500)
. list date close change in 1/5
```

	date	close	change
1.	02jan2001	1283.27	.
2.	03jan2001	1347.56	64.29004
3.	04jan2001	1333.34	-14.22009
4.	05jan2001	1298.35	-34.98999
5.	08jan2001	1295.86	-2.48999

We will use the first 57 observations from these data:


```
. twoway bar change date in 1/57
```

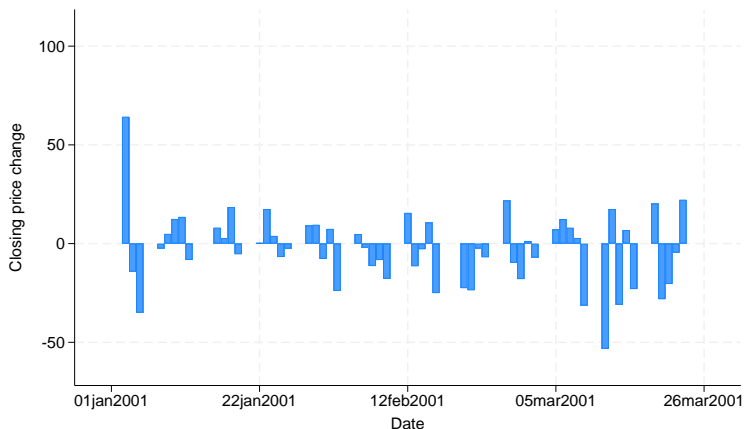

4 graph twoway bar — Twoway bar plots

We get a different visual effect if we reduce the width of the bars from 1 day to .6 days:


```
. twoway bar change date in 1/57, barw(.6)
```

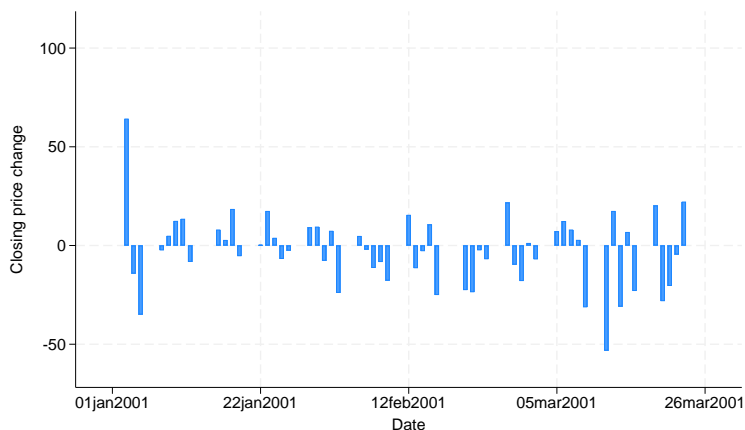

Advanced use: Overlaying


The useful thing about twoway bar is that it can be combined with other twoway plottypes (see [\[G-2\] graph twoway](#)):

```
. twoway line close date || bar change date || in 1/52
```

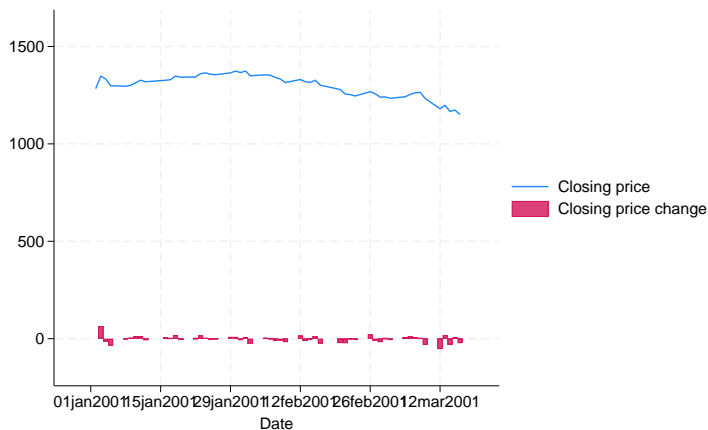

We can improve this graph by typing

```
. twoway
    line close date, yaxis(1)
    ||
    bar change date, yaxis(2)
    ||
in 1/52,
    ysca(axis(1) r(1000 1400)) ylab(1200(50)1400, axis(1))
    ysca(axis(2) r(-50 300)) ylab(-50 0 50, axis(2))
    ytick(-50(25)50, axis(2) grid)
    legend(off)
    xtitle("Date")
    title("S&P 500")
    subtitle("January to March 2001")
    note("Source: Yahoo!Finance and Commodity Systems, Inc.")
    yline(1150, axis(1) lstyle(foreground))
```

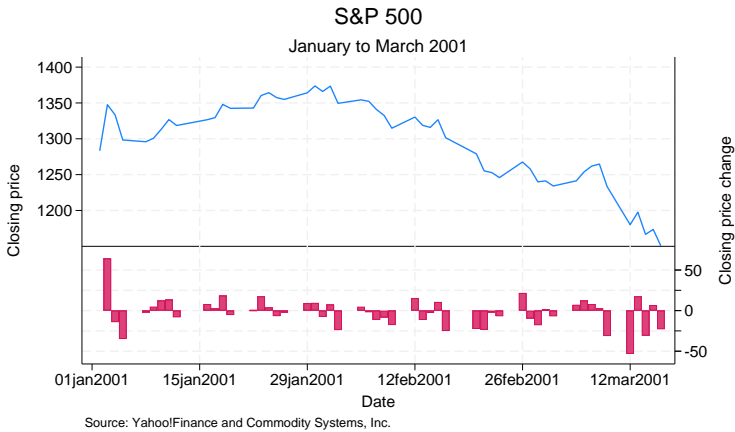

Notice the use of

```
ylines(1150, axis(1) lstyle(foreground))
```

The 1150 put the horizontal line at $y = 1150$; `axis(1)` stated that y should be interpreted according to the left y axis; and `lstyle(foreground)` specified that the line be drawn in the foreground style.


Advanced use: Population pyramid

We have the following aggregate data from the U.S. 2000 Census recording total population by age and sex. From this, we produce a population pyramid:

```
. use https://www.stata-press.com/data/r18/pop2000, clear
(2000 U.S. Census population by age and sex)
. list agegrp maletotal femtotal
```


	agegrp	maletotal	femtotal
1.	Under 5	9,810,733	9,365,065
2.	5 to 9	10,523,277	10,026,228
3.	10 to 14	10,520,197	10,007,875
4.	15 to 19	10,391,004	9,828,886
5.	20 to 24	9,687,814	9,276,187
6.	25 to 29	9,798,760	9,582,576
7.	30 to 34	10,321,769	10,188,619
8.	35 to 39	11,318,696	11,387,968
9.	40 to 44	11,129,102	11,312,761
10.	45 to 49	9,889,506	10,202,898
11.	50 to 54	8,607,724	8,977,824
12.	55 to 59	6,508,729	6,960,508
13.	60 to 64	5,136,627	5,668,820
14.	65 to 69	4,400,362	5,133,183
15.	70 to 74	3,902,912	4,954,529
16.	75 to 79	3,044,456	4,371,357
17.	80 to 84	1,834,897	3,110,470

```
. replace maletotal = -maletotal/1e+6
(17 real changes made)
. replace femtotal = femtotal/1e+6
(17 real changes made)
. twoway
    bar maletotal agegrp, horizontal xvarlab(Males)
||
    bar femtotal agegrp, horizontal xvarlab(Females)
||
, ylabel(1(1)17, value label labsz(*.8))
xtitle("Population in millions") ytitle("")
xlabel(-10 "10" -7.5 "7.5" -5 "5" -2.5 "2.5" 2.5 5 7.5 10)
legend(label(1 Males) label(2 Females))
title("US male and female population by age")
subtitle("Year 2000")
note("Source: U.S. Census Bureau, Census 2000, Tables 1, 2, and 3", span)
```

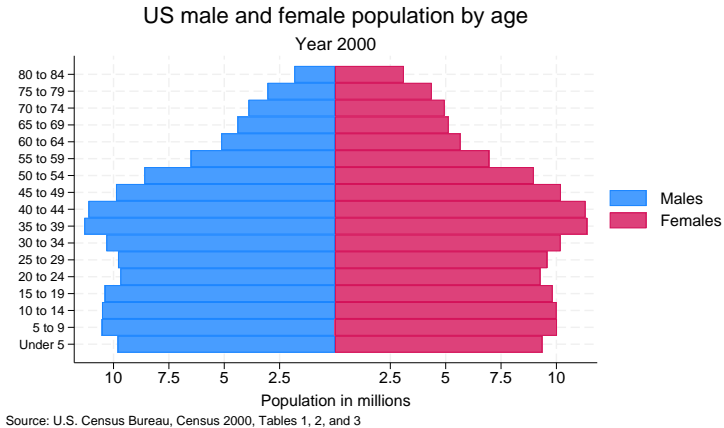

At its heart, the above graph is simple: we turned the bars sideways and changed the male total to be negative. Our first attempt at the above was simply

```
. use https://www.stata-press.com/data/r18/pop2000, clear
(2000 U.S. Census population by age and sex)
. replace maletotal = -maletotal
(17 real changes made)
. twoway bar maletotal agegrp, horizontal ||
  bar femtotal agegrp, horizontal
```

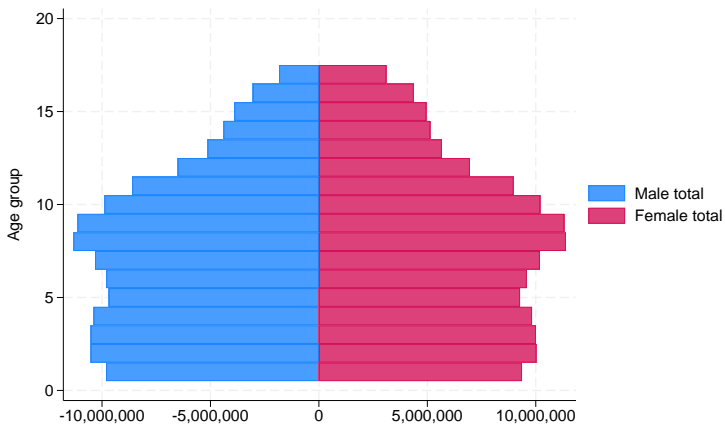


From there, we divided the population totals by 1 million and added options.

`xlabel(-10 "10" -7.5 "7.5" -5 "5" -2.5 "2.5" 2.5 5 7.5 10)` was a clever way to disguise that the bars for males extended in the negative direction. We said to label the values -10 , -7.5 , -5 , -2.5 , 2.5 , 5 , 7.5 , and 10 , but then we substituted text for the negative numbers to make it appear that they were positive. See [G-3] [axis_label_options](#).

Using the `span` suboption to `note()` aligned the text on the left side of the graph rather than on the plot region. See [G-3] [textbox_options](#).

For another rendition of the pyramid, we tried

```
. use https://www.stata-press.com/data/r18/pop2000, clear
(2000 U.S. Census population by age and sex)
. replace maletotal = -maletotal/1e+6
(17 real changes made)
. replace femtotal = femtotal/1e+6
(17 real changes made)
. generate zero = 0
. twoway
    bar maletotal agegrp, horizontal xvarlab(Males)
||
    bar femtotal agegrp, horizontal xvarlab(Females)
||
    sc agegrp zero    , mlabel(agegrp) mlabcolor(black) msymbol(i)
||
    , xtitle("Population in millions") ytitle("")
ysca(noline) ylabel(none)                                (note 1)
xsca(noline titlegap(-3.5))                             (note 2)
xlabel(-12 "12" -10 "10" -8 "8" -6 "6" -4 "4" 4(2)12, tlength(0)
                                           gmin gmax)
legend(label(1 Males) label(2 Females)) legend(order(1 2))
title("US male and female population by age, 2000")
note("Source: U.S. Census Bureau, Census 2000, Tables 1, 2, and 3")
```

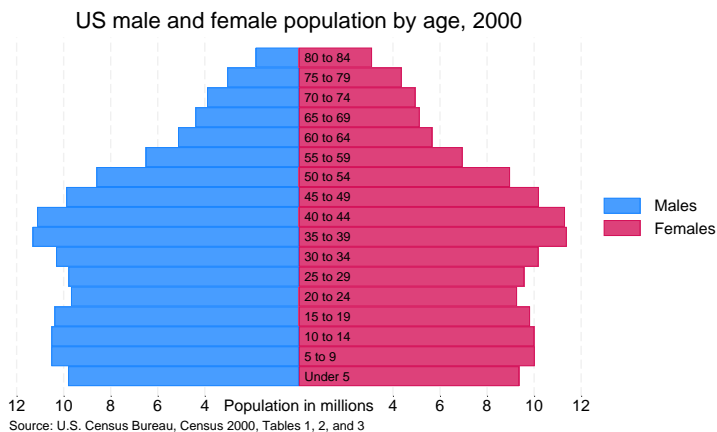

In the above rendition, we moved the labels from the x axis to inside the bars by overlaying a scatter on top of the bars. The points of the scatter we plotted at $y = \text{agegrp}$ and $x = 0$, and rather than showing the markers, we displayed marker labels containing the desired labelings. See [\[G-3\] marker_label_options](#).

We also played the following tricks:

1. `ysca(noline)` suppressed drawing the y axis—see [\[G-3\] axis_scale_options](#)—and `ylabel(none)` suppressed labeling it—see [\[G-3\] axis_label_options](#).
2. `xsca(noline titlegap(-3.5))` suppressed drawing the x axis and moved the x -axis title up to be in between its labels; see [\[G-3\] axis_scale_options](#).

Cautions

You must extend the scale of the axis, if that is necessary. Consider using `twoway bar` to produce a histogram (ignoring the better alternative of using `twoway histogram`; see [G-2] [graph twoway histogram](#)). Assume that you have already aggregated data of the form

x	frequency
1	400
2	800
3	3,000
4	1,800
5	1,100

which you enter into Stata to make variables `x` and `frequency`. You type

```
. twoway bar frequency x
```

to make a histogram-style bar chart. The y axis will be scaled to go between 400 and 3,000 (labeled at 500, 1,000, . . . , 3,000), and the shortest bar will have zero height. You need to type

```
. twoway bar frequency x, ysca(x(0))
```

Reference

Jann, B. 2015. [Stata tip 122: Variable bar widths in two-way graphs](#). *Stata Journal* 15: 316–318.

Also see

- [G-2] [graph twoway scatter](#) — Twoway scatterplots
- [G-2] [graph twoway dot](#) — Twoway dot plots
- [G-2] [graph twoway dropline](#) — Twoway dropped-line plots
- [G-2] [graph twoway histogram](#) — Histogram plots
- [G-2] [graph twoway spike](#) — Twoway spike plots
- [G-2] [graph bar](#) — Bar charts

Stata, Stata Press, and Mata are registered trademarks of StataCorp LLC. Stata and Stata Press are registered trademarks with the World Intellectual Property Organization of the United Nations. StataNow and NetCourseNow are trademarks of StataCorp LLC. Other brand and product names are registered trademarks or trademarks of their respective companies. Copyright © 1985–2023 StataCorp LLC, College Station, TX, USA. All rights reserved.



For suggested citations, see the FAQ on [citing Stata documentation](#).